

Standard Construction




LYNDEN DOOR, INC.
P.O. BOX 528
177 WEST MAIN ST.
LYNDEN, WA 98264
PHONE (360) 354-5676
FAX (360) 354-3738

HARDBOARD & PREFINISHED HOLLOW CORE

APPLICATIONS & BENEFITS

Recommended for a wide range of residential and light commercial applications. The prefinished hollow core offers consistent quality and reduced onsite finishing costs. Available in a wide variety of finishes. The Raw and Primed Hardboard provide excellent paint surfaces for custom finishes.

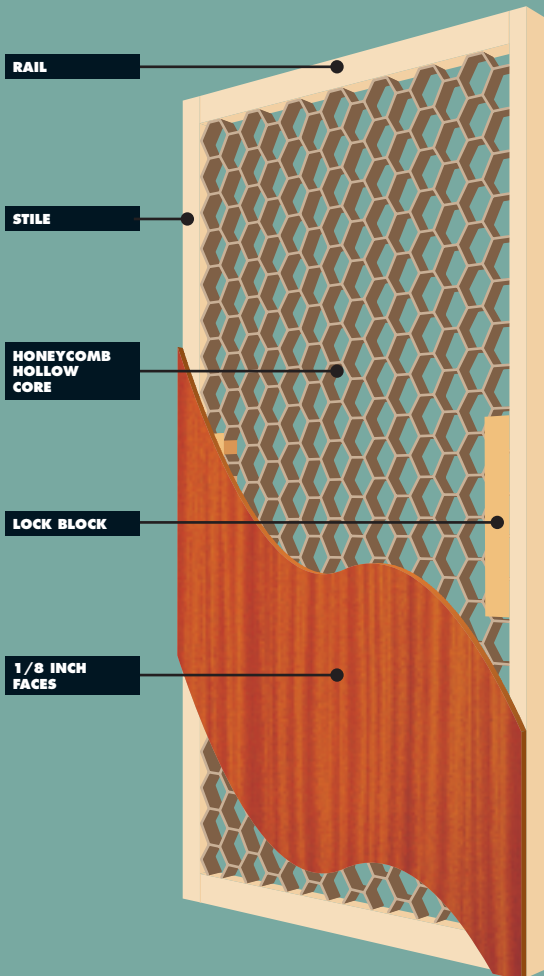

SPECIFICATIONS

MAXIMUM SIZE

(Nonrated)
Single doors 4'0" x 10'0"
Regular and Double Egress Paired doors 8'0" x 10'0"

DOOR THICKNESS

1³/₈" and 1³/₄" standard.

STILES

1³/₈" doors: Minimum 1¹/₈" (before trim) fiberboard edges. Fingerjoint edges available upon request.

1³/₄" doors: Minimum 1¹/₄" (before trim) fingerjoint stiles.

RAILS

1³/₈" doors: Minimum 2¹/₄" (before trim) mill option fiberboard rails.

1³/₄" doors: Minimum 2⁵/₈" (before trim) mill option softwood rails.

LOOSE LAY CORE AND FRAME ASSEMBLY

Expanded honeycomb core with 5" cell and 3" particle board lockblocks.

FACES

Pregraded: Hardboard, Primed Hardboard, Paper Overlay, and Printed Hardboard skins available.

ADHESIVES

Core and frame assembly and veneer application all with Type II water-resistant adhesives. Type I waterproof adhesive available upon request.

BLOCKING

Special inner blocking options may be specified for hardware reinforcement or light cutouts.

FACTORY MACHINING/DETAILING

Complete range of machining capabilities and detailing available.

WARRANTY

One year for interior use only. See warranty terms and conditions. Use of Lynden Door, Inc. interior doors in exterior applications is neither recommended nor warranted.