

Standard Construction




LYNDEN DOOR, INC.
 P.O. BOX 528
 177 WEST MAIN ST.
 LYNDEN, WA 98264
 PHONE (360) 354-5676
 FAX (360) 354-3738

MOLDED HOLLOW CORE

APPLICATIONS & BENEFITS

Recommended for a wide variety of residential and light commercial applications. The molded panel creates the look of a solid wood interior door, yet offers superior performance to solid wood against moisture related issues. Available in a wide variety of designs with smooth and textured surfaces.

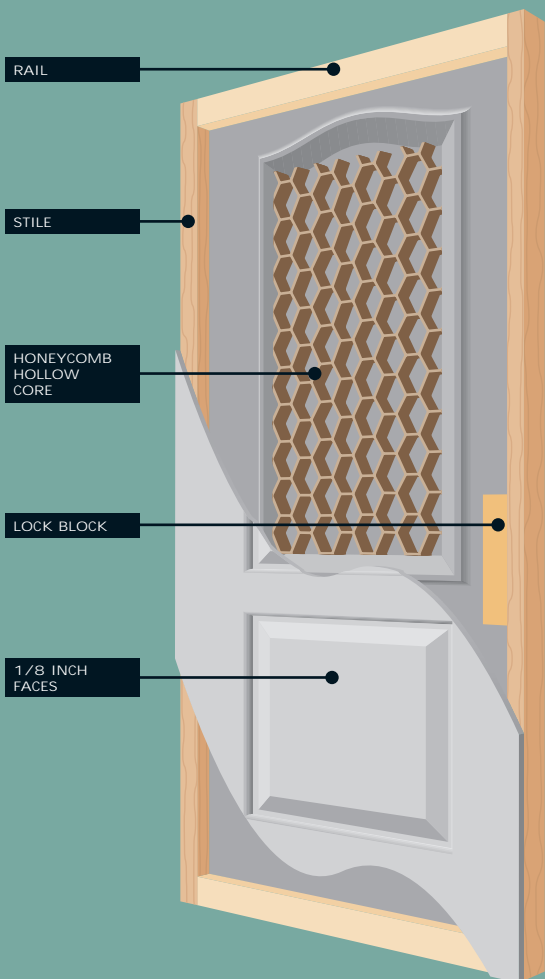

SPECIFICATIONS

MAXIMUM SIZE

3'0" x 6'8"
 3'0" x 7'0"
 3'0" x 8'0"

DOOR THICKNESS

1³/₈" and 1³/₄".

STILES

Widths are before trim mill option fingerjoint softwood stiles.

	1 ³ / ₈ "	1 ³ / ₄ "
6'8" high doors	minimum 1 ¹ / ₈ "	minimum 1 ¹ / ₈ "
7'0" high doors	minimum 1 ¹ / ₈ "	minimum 1 ¹ / ₈ "
8'0" high doors	minimum 1 ⁷ / ₈ "	minimum 1 ¹ / ₈ "

RAILS

1³/₈" doors: Minimum 2¹/₄" (before trim) mill option fiberboard rails, wood rails available upon request.

1³/₄" doors: Minimum 2⁵/₈" (before trim) mill option softwood rails.

LOOSE LAY CORE AND FRAME ASSEMBLY

Standard blocking using corrugated pad blocks, with 3" wide particle board lockblocks, see drawings on reverse.

FACES

Pregraded 1/8" Molded Hardboard skins. Available in a wide variety of styles.

ADHESIVES

Core and frame assembly and molded skin application all with Type II water-resistant adhesives. Type I waterproof adhesive is available upon request.

BLOCKING

Special inner blocking options may be specified for hardware reinforcement or light cutouts.

FACTORY MACHINING/DETAILING

Complete range of machining capabilities and detailing available.

WARRANTY

One year for interior use only. See warranty terms and conditions. Use of Lynden Door, Inc. interior doors in exterior applications is neither recommended nor warranted.

