

Standard Construction




LYNDEN DOOR, INC.
P.O. BOX 528
177 WEST MAIN ST.
LYNDEN, WA 98264
PHONE (360) 354-5676
FAX (360) 354-3738

HARDBOARD AND PREFINISHED BIFOLDS

APPLICATIONS & BENEFITS

Recommended for a wide range of residential and light commercial applications. The prefinished bifold offers consistent quality and reduced onsite finishing costs. Available in a wide variety of finishes. The Unfinished and Primed Hardboard provide excellent paint surfaces for custom finishes.

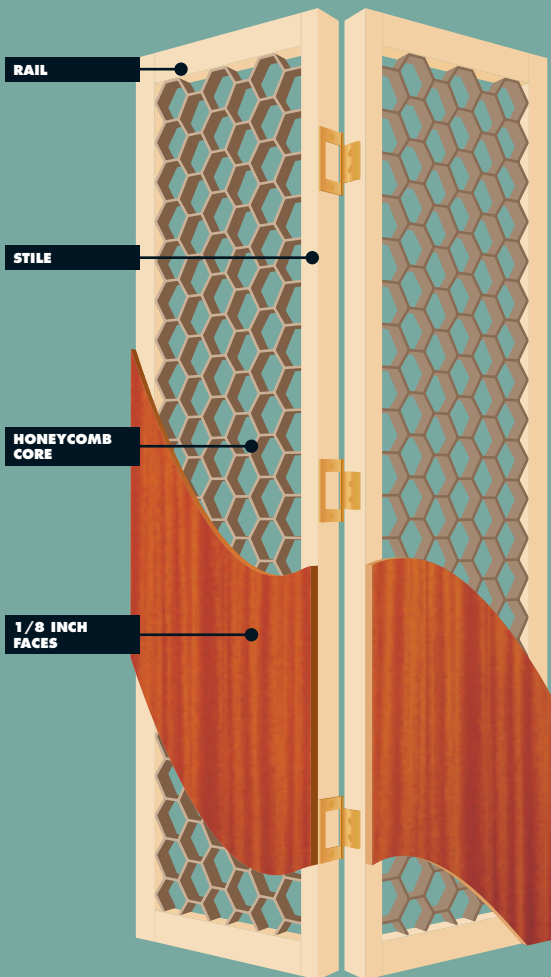

SPECIFICATIONS

MAXIMUM SIZE

Two door bifolds 4'0" x 8'0"
Four door bifolds 8'0" x 8'0"

DOOR THICKNESS

1³/₈" standard, 1³/₄" available upon request.

STILES

1³/₈" bifolds: Minimum 1¹/₈" (before trim) mill option fiberboard stiles, softwood stiles available upon request.

1³/₄" bifolds: Minimum 1¹/₄" (before trim) mill option softwood stiles.

RAILS

1³/₈" bifolds: Minimum 1⁷/₈" (before trim) mill option fiberboard or softwood rails.

1³/₄" bifolds: Minimum 2⁵/₈" (before trim) mill option softwood rails.

LOOSE LAY CORE AND FRAME ASSEMBLY

Expanded honeycomb core with a 5" cell.

FACES

Pregraded: Hardboard, Primed Hardboard, Paper Overlay and Printed Hardboard skins available. Backs are mill option Hardboard skins. Matching backs available upon request.

ADHESIVES

Core and frame assembly and veneer application all with Type II water resistant adhesives. Type I waterproof adhesives available upon request.

BLOCKING

Special inner blocking options may be specified for hardware reinforcement.

FACTORY MACHINING

Complete range of machining capabilities and detailing available.

HINGES AND HARDWARE

Three edge mounted Stanley butterfly hinges per two panel set, with Stanley 2400 series hardware.

PACKAGING

All bifolds are individually boxed into two door and four door bifold sets, using corrugated boxes.

WARRANTY

One year for interior use only. See warranty terms and conditions. Use of Lynden Door, Inc. interior doors in exterior applications is neither recommended nor warranted.