MACHINING FORM

2077 MAIN STREET P.O. BOX 528 LYNDEN, WA 98264
PH (360)354.5676 FAX (360)318-8687

PAGE _____ OF _____

CUSTOMER _____ DATE _____

P. O. NUMBER _____ DRAWN BY _____

Note: Any and all changes must be submitted to Lynden Door in writing. No verbal changes will be accepted. Accuracy of information is the responsibility of the customer.

HINGE

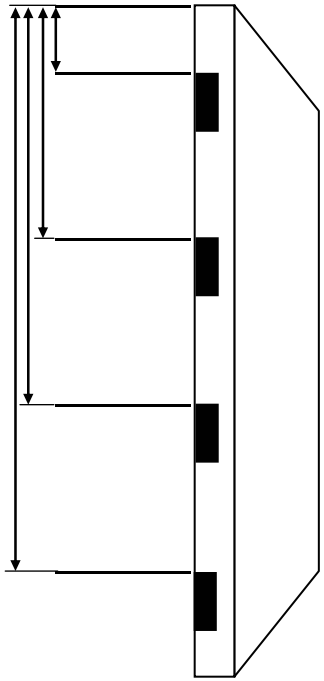

HINGES

SIZE _____
BACKSET _____
THICKNESS _____
PIVOT _____
TEMPLATE NO. _____

HINGE CORNERS

☐ 1/4" Radius
☐ 5/8" Radius
☐ Square

3 degree BEVELS

☐ Lock Edge
☐ Hinge Edge

NOTE: WHEN WIRE CHASE IS REQUIRED, DESIGNATE HINGE TO RECEIVE WIRE WITH AN "X"

ACTIVE

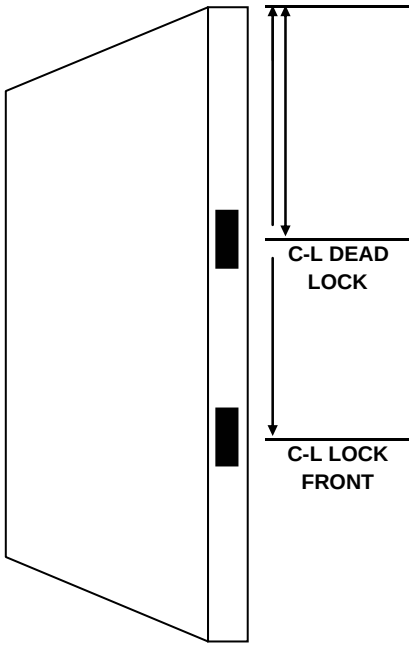

LOCKS / EXIT DEVICES

	BORED LOCK	DEAD LOCK
FACE BORE		
BOLT BORE		
BACKSET		
F-P THICKNESS		
F-PLATE WIDTH		
F-P HEIGHT		

CORNERS

☐ 1/4" Radius ☐
☐ Square ☐

MORTISE LOCK _____
CARD LOCK _____
EXIT DEVICE _____

MANUFACTURER _____
TEMPLATE NO. _____
FUNCTION NO. _____

NOTE: * EXIT DEVICE BACK-SET SHALL BE GIVEN AS THE DISTANCE FROM C-L OF DEVICE TO C-L OF DOOR THICKNESS AT LOCK STILE UNLESS OTHERWISE NOTED.

INACTIVE

STRIKES

☐ 1-1/4 X 4-7/8" ASA
☐ 1-1/8 X 2-3/4" LIP
☐ 1-1/8 X 2-3/4" D-BOLT

☐ DUSTBOX

OTHER _____
MFG. _____
TEMP. _____

FLUSH BOLTS

MFG. _____
TEMP. NO. _____
CORNER PRE _____

3 degree BEVELS

☐ Lock Edge
☐ Hinge Edge

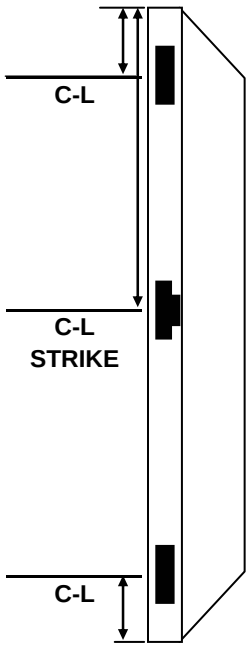

LIABILITY FOR MACHINING ACCURACY WILL BE ASSUMED ONLY UPON RECEIPT OF TEMPLATE, COMPLETED LYNDEN DOOR DETAIL SHEETS AND PHYSICAL SAMPLES AS REQUIRED.

SPEC. NO.		SPEC. NO.