

Lynden Door Commercial / Architectural Door Required Order Information

Note: Any and all changes must be submitted to Lynden Door in writing. No verbal changes will be accepted. Accuracy of information is the responsibility of the customer.

Quantity	Width	Height	Model Remarks	Specie	Fire Rating	Stile	Bevel	Swing	Additional Blocking		Mach Spec	Lite Dwg	Mark #
									9	10			
1	2	3	4	5	6	7	8	9	10	11	12	13	

1) Quantity Ordered

2) Door Size - List net width and height in feet and inches

(i.e. 35 3/4" x 83 1/4")

Note: 60- and 90-minute fire doors, doors with MVE or 3/8" MHE cannot be re-trimmed in the field. These doors MUST be factory sized. 3/4" matching stile blocking is available for some non-rated and 20-minute rated models at an extra cost.

3) Model and Thickness

To specify thickness, add either -4 for 1-3/4" or -8 for 1-3/8" thickness after model number; (ie: CD200-4 = 1-3/4" particle core)

<u>Commercial - CD</u>	<u>Architectural - LD</u>	
CD100	LD1000	Hollow (honeycomb) core
CD200	LD2000	Particle board core
CD250	LD2500	Agfiber Particle core
CD300	LD3000	Lumber (stave) core
CD350	LD3500	LSL Timberstrand core
CD450	LD4500	Mineral core, 45 minute rated
CD600	LD6000	Mineral core, 60 minute rated
CD900	LD9000	Mineral core, 90 minute rated

For bifolds in hollow, particle, or lumber core, follow the model number with either BF2 for two panel or BF4 for four panel. Twenty minute doors available in particle, lumber or LSL core. For lead lined (4 pound lead) in either particle or lumber core, follow the model number with LL. (Labeled LL doors not available.)

3a) Remarks - Any other special instructions, door numbers, blocking requirements, etc. may be entered below each line in this area.

4) Specie

List face specie and desired cut (ie: Rotary, P.S., Rift, etc.)
List exterior grade if applicable.

5) Fire rating - List the applicable rating when required
Specify Neutral Pressure or Positive Pressure Cat. A or B as follows:

- 20NP = Neutral Pressure
- 20PPA = Positive Pressure Cat. A
- 20PPB = Positive Pressure Cat. B


6) Stiles - List stiles as follows:

SES	Softwood edge stile
HES	Hardwood edge stile (Mill Option Hardwood)
MES	Matching edge stile (To Face Specie)
MVE	Veneered edge stile (To Face Specie)

7) Bevel - When a bevel is required list as follows;

- BK- Book (No Bevel)
- B1E - Bevel one edge (Lock Edge)
- B2E - Bevel two edges
- BHE- Bevel hinge edge only

8) Swing - List Swing as shown when required:

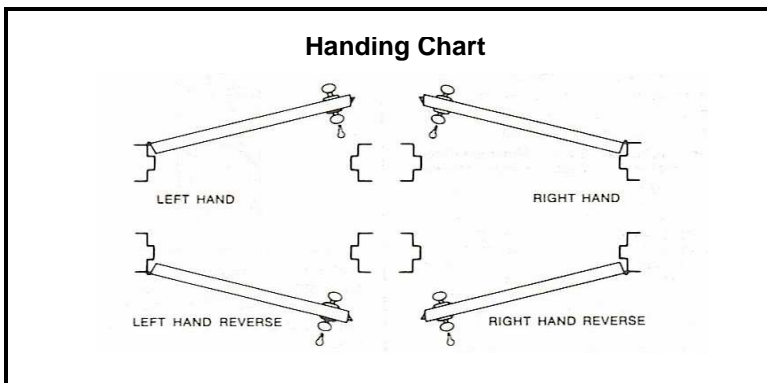

LH, RH, LHR, or RHR as shown above.

9, 10) Additional Blocking - Specify additional internal blocking as follows:

- TR - 5" top rail closer blocking
- BR - 5" bottom rail blocking
- MR - 5" exit device mid blocking
- LB - Lock block

11) Hardware Drawing - List drawing **number** per line item and attach to order. Use separate machining detail sheet for each hardware group.

12) Lite Drawing - List lite drawing **letter** per line item and attach to order. Ensure that lite cutouts have adequate clearance from hardware or other cutouts. (5" minimum)

13) Marking - When doors require marking, list mark numbers in this column. If more than one mark number is required per line item, use next line or attach list.