


Commercial Doors

CD100 HOLLOW CORE

APPLICATIONS & BENEFITS

Recommended for a small range of Commercial applications. The hollow core offers light weight and reduced costs where a light-duty door or bifold is appropriate. Available in a wide variety of hardwood and hardboard faces.

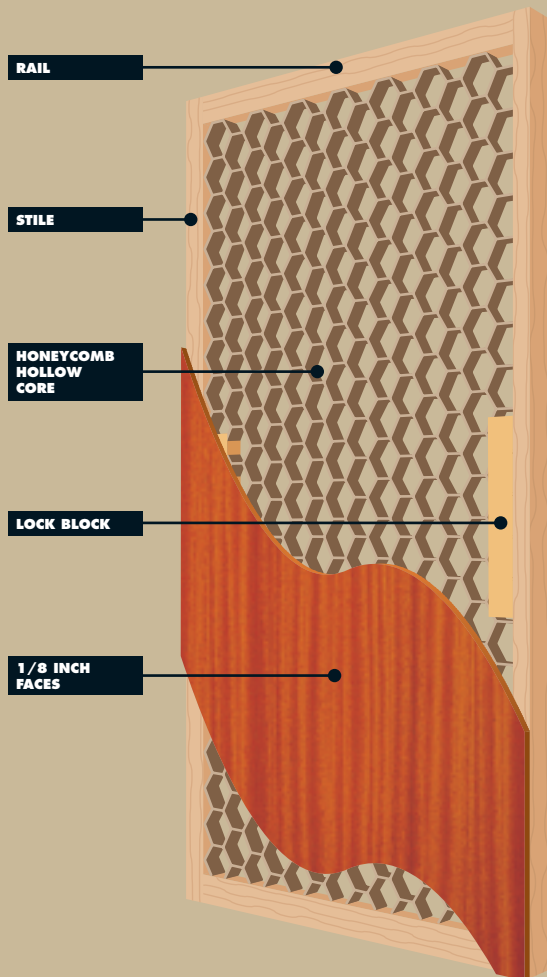

Lynden Door™

LYNDEN DOOR, INC.
P.O. BOX 528
177 WEST MAIN ST.
LYNDEN, WA 98264
PHONE (360) 354-5676
FAX (360) 354-3738

SPECIFICATIONS

MAXIMUM SIZE

(Nonrated)
Single doors 4'0" x 10'0"
Regular and Double Egress Paired doors 8'0" x 10'0"

DOOR THICKNESS

1³/₈" and 1³/₄" standard.

STILES

Minimum 1¹/₄" (before trim) softwood edge. Solid hardwood outer edges matching (compatible with) the face veneer are available.

RAILS

Minimum 2" (before trim) mill option wood rails. Matching (compatible) wood rails available upon request.

LOOSE LAY CORE AND FRAME ASSEMBLY

Expanded honeycomb core with particle board lockblocks both stiles.

FACES

Pregraded: Hardboard, Medium Density Overlay, or Premium 3-ply veneered skins (minimum 1/50" veneer before sanding). Veneers available in a wide variety of species and cuts.

ADHESIVES

Core and frame assembly and veneer application all with Type 1, waterproof adhesives.

BLOCKING

Special inner blocking options may be specified for reinforcing of hardware or light cutouts. Wooden lock blocks are available.

FACTORY MACHINING/DETAILING

Complete range of machining capabilities and detailing available.

LIGHT OPENINGS

Cut-out area may not exceed 40% of the face or half of the door height to comply with the warranty. All cut-outs must be 6" from the edge of the door or any other cutouts and/or hardware preps.

WARRANTY

Five years for interior use only. See warranty terms and conditions. Use of Lynden Door, Inc. CD100 doors in exterior applications is neither recommended nor warranted.