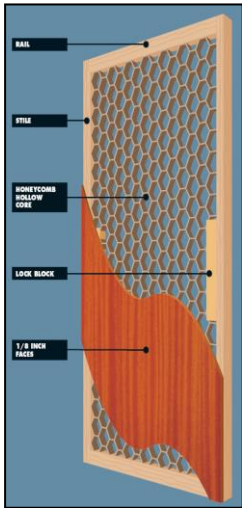


**Lynden Door
Commercial Series**
**CD100
Hollow Core**
Non Rated


| | |
|----------------------|---|
| FACES: | HPVA Architectural "A" grade wood veneer (minimum thickness 1/50" before sanding) Options: "AA" grade wood veneer, paint grade MDO Hardboard (PC3) |
| SUBSTRATE: | Engineered wood composites |
| CORE: | Supercell expanded kraft corrugated paper with particleboard lockblocks |
| STILES: | Softwood - AWS Type A Solid Wood Option: (CE) Compatible with face veneer, AWS Type B Wood Veneer |
| RAILS: | Mill option structural composite lumber, wood or composite material. |
| ASSEMBLY: | Non Bonded (Loose Lay). |
| ADHESIVES: | Type 1 |
| MAXIMUM SIZE: | 4'0" x 10'0" (1220mm x 3050mm) |
| THICKNESS: | 1 3/8" (35 mm) or 1 3/4" (45 mm) |

| | |
|----------------------------------|--|
| WARRANTY: | 2 years, for interior use only. See warranty terms and conditions |
| STANDARDS: | Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty Standards when specified with blocking for surface applied hardware without through bolts. Option: WDMA IS-1A and AWS Custom Grade |
| FIRE RATING: | Not applicable |
| ACOUSTICAL RATING | Not applicable |
| ENVIRONMENTAL Attributes: | Recycled content, regionally recovered and manufactured, may apply – see GREENDOR™ Contribution Sheets. |

Manufacturing Options

| | |
|---------------------------|--|
| BLOCKING: | Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8) |
| MACHINING: | Machining for hardware, open cutouts, installation of lites and louvers, applied moldings, plant ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings. |
| TRANSPARENT FINISH | WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains Options: Other finish systems available |
| OPAQUE FINISH: | Factory painting in standard and custom match colors Options: Standard or color tinted priming available |