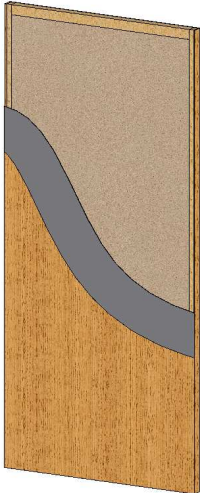


**Lynden Door
Commercial Series
GREENDOR™**
**CD600 NAUF HPDL 5-Ply
Mineral Core
NAUF
60 min. Rated**


FACES:	High pressure decorative laminate (HPDL) faces to meet minimum requirements of National Electrical Manufacturers Association (NEMA) Standard LD 3 High Pressure Decorative Laminates.	
SUBSTRATE:	Engineered wood composites	
CORE:	Fire rated mineral	
STILES:	Fire rated composite with decorative laminate face, AWS Type-C-HPDL Option: Wood edges painted or stained to complement decorative laminate face PVC Edgebanding	
RAILS:	Mill option fire rated composite material.	
ASSEMBLY:	Bonded assembly in compliance with fire door listings.	
ADHESIVES:	Type 1	
MAXIMUM SIZE:	POSITIVE PRESSURE WITH HOSE STREAM 4'0" x 9'0" (1220mm x 2743mm)	NEUTRAL PRESSURE WITH HOSE STREAM 4'0 x 10'0 (1220mm x 3050mm)
THICKNESS:	1 3/4" (45 mm)	Option: Up to 2 1/2" (63.5 mm)

WARRANTY:	5 years, for interior use only. See warranty terms and conditions	
STANDARDS:	Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty Standards when specified with blocking for surface applied hardware without through bolts. Option: WDMA IS-1A and AWS Custom Grade	
FIRE RATING:	Positive Pressure Category B or Neutral Pressure Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFP 252 Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.	Option: Positive Pressure Category A
ACOUSTICAL RATING	Information presently not available.	
ENVIRONMENTAL Attributes:	All adhesives and binders in this product contain no added urea-formaldehyde. This product is manufactured with pre-consumer recycled material. This product may contribute to credits requiring regional manufacturing. For additional information on product contribution please refer to the GREENDOR™ Contribution Sheets.	

Manufacturing Options

BLOCKING:	Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8)
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, sketch faces, applied moldings, plant ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.