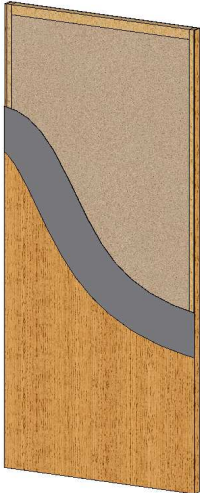


**Lynden Door
Commercial Series
GREENDOR™**
**CD600 NAUF
Mineral Core
NAUF
60 min. Rated**


FACES:	HPVA Architectural "A" grade wood veneer (minimum thickness 1/50" before sanding) Options: "AA" grade wood veneer, paint grade MDO Hardboard				
SUBSTRATE:	Engineered wood composites				
CORE:	Fire rated mineral				
STILES:	Fire rated composite with outer band of mill option AWS Type A wood Option: (CE) Compatible with face veneer, AWS Type B Wood Veneer				
RAILS:	Mill option fire rated composite material.				
ASSEMBLY:	Bonded assembly in compliance with fire door listings.				
ADHESIVES:	Type 1				
MAXIMUM SIZE:	<table border="0"> <tr> <td><small>POSITIVE PRESSURE WITH HOSE STREAM</small></td> <td>4'0" x 9'0" (1220mm x 2743mm)</td> <td><small>NEUTRAL PRESSURE WITH HOSE STREAM</small></td> <td>4'0 x 10'0 (1220mm x 3050mm)</td> </tr> </table>	<small>POSITIVE PRESSURE WITH HOSE STREAM</small>	4'0" x 9'0" (1220mm x 2743mm)	<small>NEUTRAL PRESSURE WITH HOSE STREAM</small>	4'0 x 10'0 (1220mm x 3050mm)
<small>POSITIVE PRESSURE WITH HOSE STREAM</small>	4'0" x 9'0" (1220mm x 2743mm)	<small>NEUTRAL PRESSURE WITH HOSE STREAM</small>	4'0 x 10'0 (1220mm x 3050mm)		
THICKNESS:	<table border="0"> <tr> <td>1 3/4" (45 mm)</td> <td>Option: Up to 2 1/2" (63.5 mm)</td> </tr> </table>	1 3/4" (45 mm)	Option: Up to 2 1/2" (63.5 mm)		
1 3/4" (45 mm)	Option: Up to 2 1/2" (63.5 mm)				

WARRANTY:	5 years, for interior use only. See warranty terms and conditions		
STANDARDS:	Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty Standards when specified with blocking for surface applied hardware without through bolts. Option: WDMA IS-1A and AWS Custom Grade		
FIRE RATING:	Positive Pressure Category B or Neutral Pressure Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFP 252 Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.	Option: Positive Pressure Category A	
ACOUSTICAL RATING	Information presently not available.		
ENVIRONMENTAL Attributes:	All adhesives and binders in this product contain no added urea-formaldehyde. This product is manufactured with pre-consumer recycled material. This product may contribute to credits requiring regional regional manufacturing. For additional information on product contribution please refer to the GREENDOR™ Contribution Sheets.		

Manufacturing Options

BLOCKING:	Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8)		
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, sketch faces, applied moldings, plant ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.		
TRANSPARENT FINISH	WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains	Options: Other finish systems available	
OPAQUE FINISH:	Factory painting in standard and custom match colors	Options: Standard or color tinted priming available	