Lynden Door

Division 08 14 16
Wood Flush Doors

Lynden Door
Architectural Series

IC3000 SLC
Stave Lumber Core

Non Rated or 20 min.

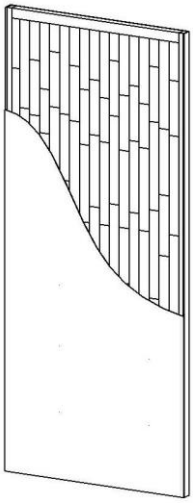

FACES: Limited wood veneers

SUBSTRATE: Engineered wood composites or wood veneer plywood

CORE: Wood Stave Lumber WDMA I.S. 1-A C-3

STILES: (CE) Compatible with face veneer, mill option AWS Type A wood or Type B veneered

Option: (ME) Matching with face veneer

RAILS: Mill option structural composite lumber, wood or composite material.

ASSEMBLY: Stiles and rails are securely bonded to the core and the assembled unit is sanded prior to application of faces.

ADHESIVES: Type 1

MAXIMUM SIZE: 4'0" x 8'0" (1220mm x 2438mm)

THICKNESS: 20 min rated 1 ¾" (45 mm)
Non-rated 1 3/8" (35 mm) or 1 ¾" (45 mm)

WARRANTY: Five (5) years for interior use only. See warranty terms and conditions

STANDARDS: Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty standards

FIRE RATING: Positive Pressure Category B or Neutral Pressure **Option:** Positive Pressure Category A
Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFPA 252
Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B
For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.

ACOUSTICAL RATING STC 32 ASTM E90-78 - Operable

ENVIRONMENTAL Attributes: Recycled content, regionally recovered and manufactured, may apply – see GREENDOR™ Contribution Sheets.

Manufacturing Options

BLOCKING: No additional blocking required. Core material complies with Screw holding WDMA TM-10 extra heavy duty.

MACHINING: Machining for hardware, open cutouts, installation of lites and louvers, applied moldings, plant ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.

TRANSPARENT FINISH WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains
Options: Other finish systems available

OPAQUE FINISH: Factory painting in standard and custom match colors **Options:** Standard or color tinted priming available

All data and information provided is for informational purposes only. It is subject to change without notice. To be sure you have the latest revision page please either visit our website @ www.lyndendoor.com or contact your Lynden Door, Inc. representative.