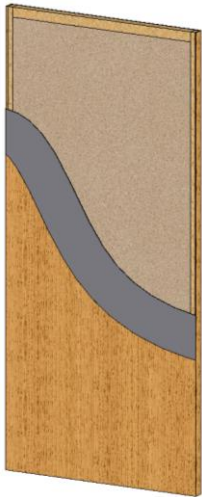


**Lynden Door
Architectural Series**
**LD2000LL NAUF PC HPDL
Wood Particleboard Lead Lined Core
NAUF
Non Rated or 20 min.**


FACES:	High pressure decorative laminate (HPDL) faces to meet minimum requirements of National Electrical Manufacturers Association (NEMA) Standard LD 3 High Pressure Decorative Laminates.		
SUBSTRATE:	Engineered wood composites		
CORE:	Particleboard ANSI A208.1 LD1	Option: LD2	
STILES:	(ME) Matching edges, fire rated composite with decorative laminate face, AWS Type-C-HPDL		
	Option: Wood edges painted or stained to complement decorative laminate face		
RAILS:	Mill option structural composite lumber, wood or composite material.		
ASSEMBLY:	Stiles and rails are securely bonded to the core and the assembled unit is sanded prior to application of faces.		
ADHESIVES:	Type 1		
MAXIMUM SIZE:	POSITIVE PRESSURE OR NEUTRAL PRESSURE WITH HOSE STREAM 4'0" x 8'0" (1219mm x 2438mm)	NON-RATED 4'0" x 10'0" (1219mm x 3048mm)	
THICKNESS:	20 min rated 1 ¼" (45 mm)	Option: Up to 2 ½" (63.5 mm)	
	Non-rated 1 ⅜" (35 mm) or 1 ¾" (45 mm)	Option: Up to 2 ½" (63.5 mm)	

WARRANTY:	Life of original installation for interior use only. See warranty terms and conditions		
STANDARDS:	WDMA IS-1A and AWS Custom Grade	Option: WDMA IS-1A and AWS Premium Grade	
	Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty standards when specified with blocking for surface applied hardware without through bolts.		
FIRE RATING:	Positive Pressure Category B or Neutral Pressure	Option: Positive Pressure Category A	
	Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFPA 252		
	Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B		
	For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.		
LEAD SHIELDING	Standard 4lbs with 1/32"(0.8mm) shielding layered between the core/frame assembly and the face on each side of the door, thereby eliminating the requirement for most shielding of hardware. Heavier shielding available upon request		
ACOUSTICAL RATING	Information presently not available.		
ENVIRONMENTAL Attributes:	All adhesives and binders in this product contain no added urea-formaldehyde. This product is manufactured with pre-consumer recycled material. This product may contribute to credits requiring regional harvesting or recovery of raw material and regional manufacturing. For additional information on product contribution please refer to the GREENDOR™ Contribution Sheets.		

Manufacturing Options

BLOCKING:	Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8)
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, applied moldings, plant ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.
	Note: Lynden Door, Inc recommends the use of an appropriate continuous hinge for best performance of this door. When pivots are specified, it is recommended that intermediate pivot(s) be used in conjunction with top and bottom offset pivots. When hinges are specified, it is recommended that heavy weight hinges be used.