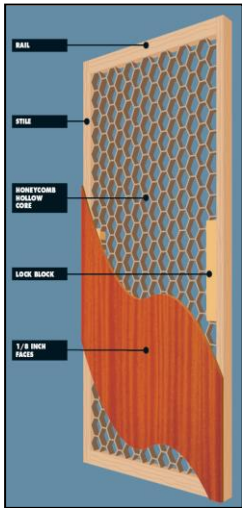


**Lynden Door
Standard Series**
**SD10
Hollow Core**
Non Rated


FACES:	Wood veneer Prefinished smooth or embossed hardboard Paint grade hardboard
SUBSTRATE:	Engineered wood composites or wood veneer plywood
CORE:	Kraft corrugated paper with particleboard lockblocks
STILES:	Mill Option Solid Softwood, FJ Softwood, MDF Option: (CE) Compatible with face veneer
RAILS:	Mill option wood or composite material.
ASSEMBLY:	Non Bonded (Loose Lay).
ADHESIVES:	Type 2
MAXIMUM SIZE:	4'0" x 8'0" (1220mm x 2438mm)
THICKNESS:	1 3/8" (35 mm) or 1 3/4" (45 mm)

WARRANTY:	1 year, for interior use only. See warranty terms and conditions. Possible extended warranties available, contact factory for options.
STANDARDS:	Performance attributes meet or exceed WDMA IS-1A and AWS Standard Duty standards when specified with blocking for surface applied hardware without through bolts
FIRE RATING:	N/A
ACOUSTICAL RATING	N/A
ENVIRONMENTAL Attributes:	Recycled content, regionally recovered and manufactured, may apply – see GREENDOR™ Contribution Sheets.

Manufacturing Options

BLOCKING:	Special blocking options may be specified.
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.
TRANSPARENT FINISH	WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains Options: Other finish systems available
OPAQUE FINISH:	Factory painting in standard and custom match colors Options: Standard or color tinted priming available