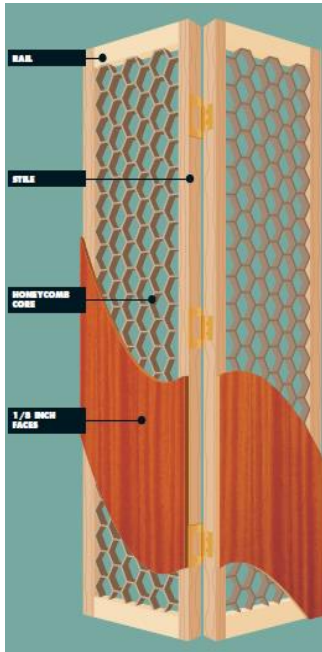


**Lynden Door
Standard Series**
GREENDOR™
**SD10BFNAUF
Hollow Core Bifold
NAUF
Non Rated**


FACES:	Wood veneer Prefinished smooth or embossed hardboard Paint grade hardboard	
SUBSTRATE:	Engineered wood composites or wood veneer plywood	
CORE:	Kraft corrugated paper pads	
STILES:	Mill Option Solid Softwood, FJ Softwood, MDF Option: (CE) Compatible with face veneer	
RAILS:	Mill option wood or composite material	
ASSEMBLY:	Non Bonded (Loose Lay).	
ADHESIVES:	Type 2	
MAXIMUM SIZE:	Two Door Bifolds	Four Door Bifolds
	4'0 X 6'8	8'0 X 6'8
	4'0 X 7'0	8'0 X 7'0
	4'0 X 8'0	8'0 X 8'0
THICKNESS:	1 3/8" (35 mm) OPTION: 1-3/4" (44 mm)	

WARRANTY: 1 year, for interior use only. See warranty terms and conditions. Possible extended warranties available, contact factory for options.

STANDARDS: Performance attributes meet or exceed WDMA IS-1A and AWS Standard Duty standards when specified with blocking for surface applied hardware without through bolts

FIRE RATING: N/A

ACOUSTICAL RATING N/A

ENVIRONMENTAL Attributes: All adhesives and binders in this product contain no added urea-formaldehyde. This product is manufactured with pre-consumer recycled material. This product may contribute to credits requiring regional harvesting or recovery of raw material and regional manufacturing. For additional information on product contribution please refer to the **GREENDOR™** Contribution Sheets.

Manufacturing Options

BLOCKING:	Special blocking options may be specified.	
MACHINING:	Bifold units supplied with hanging track and hardware. For custom hinge prep and/or hardware prep contact factory.	
TRANSPARENT FINISH	WDMA TR6 / AWS System 9 – UV cured catalyzed polyurethane finishes in standard and custom match stains	
OPAQUE FINISH:	Factory painting in standard and custom match colors	Options: Standard or color tinted priming available