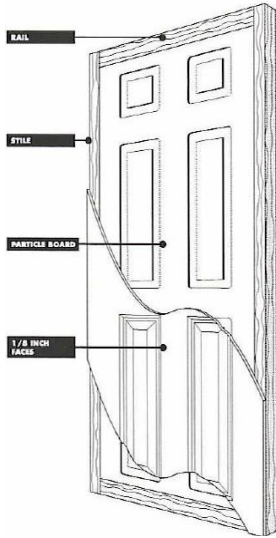


**Lynden Door
Standard Series**
**SD20 Molded NAUF
Wood Particleboard Core**
GREENDOR™
**NAUF
Non Rated or 20 min.**


FACES:	Molded hardboard in a variety of profiles Pre-stained molded hardboard in six panel profile only Note: <i>Not all profiles are available in all sizes</i>	
SUBSTRATE:	Engineered wood composites or wood veneer plywood	
CORE:	Particleboard ANSI A208.1 LD1	Option: LD2
STILES:	Mill Option FJ Softwood Option: Solid Softwood Solid Hardwood	
RAILS:	Mill option wood or MDF.	
ASSEMBLY:	Non Bonded (Loose Lay).	
ADHESIVES:	Type 2	
MAXIMUM SIZE:	POSITIVE PRESSURE OR NEUTRAL PRESSURE WITH HOSE STREAM 3'0" x 8'0" (914mm x 2438mm)	
THICKNESS:	20 min rated 1 ¼" (45 mm) Non-rated 1 ⅜" (35 mm) or 1 ¾" (45 mm)	

WARRANTY: One (1) years for interior use only. See warranty terms and conditions. Possible extended warranties available, contact factory for options.

STANDARDS: Performance attributes meet or exceed WDMA IS-1A and AWS Heavy Duty standards when specified with blocking for surface applied hardware without through bolts

FIRE RATING: Positive Pressure Category B or Neutral Pressure
Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFP 252
Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B
For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.

ACOUSTICAL RATING STC 31 Non-operable ASTM E90-09 OITC 27 Non-operable

ENVIRONMENTAL Attributes: All adhesives and binders in this product contain no added urea-formaldehyde. This product is manufactured with pre-consumer recycled material. This product may contribute to credits requiring regional harvesting or recovery of raw material and regional manufacturing.

For additional information on product contribution please refer to the **GREENDOR™** Contribution Sheets.

Manufacturing Options

BLOCKING: Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8)

MACHINING: Machining for hardware, raceways, dutch doors. Hardware cutouts shall be factory machined from manufacturers' and shop drawings.

OPAQUE FINISH: Factory painting in standard and custom match colors **Options:** Standard or color tinted priming available