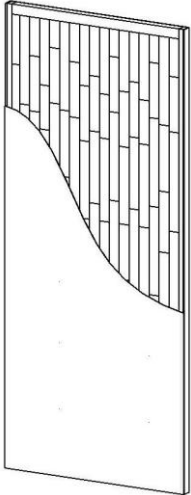


**Lynden Door
Standard Series**
**SD30
Stave Lumber Core**
Non Rated or 20 min.


FACES:	Wood veneer Prefinished smooth or embossed hardboard Paint grade hardboard
SUBSTRATE:	Engineered wood composites or wood veneer plywood
CORE:	Wood Stave Lumber WDMA I.S. 1-A C-3
STILES:	Mill option clear or fingerjointed Softwood - AWS Type A Solid Wood
RAILS:	Mill option wood or MDF.
ASSEMBLY:	Non Bonded (Loose Lay).
ADHESIVES:	Type 2
MAXIMUM SIZE:	POSITIVE PRESSURE OR NEUTRAL PRESSURE WITH HOSE STREAM 4'0" x 8'0" (1219mm x 2438mm)
THICKNESS:	20 min rated 1 3/4" (45 mm) Non-rated 1 3/8" (35 mm) or 1 3/4" (45 mm)

WARRANTY: One (1) years for interior use only. See warranty terms and conditions. Possible extended warranties available, contact factory for options.

STANDARDS: Performance attributes meet or exceed WDMA IS-1A and AWS Heavy Duty standards when specified with blocking for surface applied hardware without through bolts

FIRE RATING: Positive Pressure Category B or Neutral Pressure **Option:** Positive Pressure Category A
Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFP 252
Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B
For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.

ACOUSTICAL RATING STC 32 Operable ASTM E90-78

ENVIRONMENTAL Attributes: Recycled content, regionally recovered and manufactured, may apply – see **GREENDOR™** Contribution Sheets.

Manufacturing Options

BLOCKING: Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8)

MACHINING: Machining for hardware, open cutouts, installation of lites and louvers, raceways, concealed vertical rods, dutch doors, Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.

TRANSPARENT FINISH WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains

Options: Other finish systems available

OPAQUE FINISH: Factory painting in standard and custom match colors

Options: Standard or color tinted priming available