


Lynden Door Standard Series

GREENDOR™

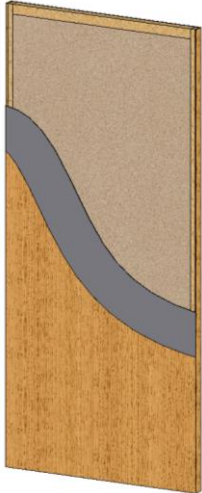

SD35 NAUF Structural Composite NAUF Non Rated or 20 min.

FACES:	Wood veneer Prefinished smooth or embossed hardboard Paint grade hardboard
SUBSTRATE:	Engineered wood composites or wood veneer plywood
CORE:	Structural Composite Lumber WDMA I.S. 1-A C-3
STILES:	Mill option clear or fingerjointed Softwood - AWS Type A Solid Wood
RAILS:	Integrated as part of the core.
ASSEMBLY:	Non Bonded (Loose Lay).
ADHESIVES:	Type 2
MAXIMUM SIZE:	POSITIVE PRESSURE OR NEUTRAL PRESSURE WITH HOSE STREAM 4'0" x 8'0" (1219mm x 2438mm)
THICKNESS:	20 min rated 1 3/4" (45 mm) Non-rated 1 3/8" (35 mm) or 1 3/4" (45 mm)

WARRANTY: One (1) years for interior use only. See warranty terms and conditions. Possible extended warranties available, contact factory for options.

STANDARDS: Performance attributes meet or exceed WDMA IS-1A and AWS Heavy Duty standards when specified with blocking for surface applied hardware without through bolts

FIRE RATING: Positive Pressure Category B or Neutral Pressure **Option:** Positive Pressure Category A
Positive Pressure tested in accordance with UBC 7-2 1997, UL-10C and NFP 252
Neutral Pressure with hose stream tested in accordance with UBC-7 1994 and UL-10B
For additional information on fire doors please refer to the Lynden Door Fire Door Technical Sheets.

ACOUSTICAL RATING STC 35 Non-operable ASTM E90-09 OITC 31 Non-operable

ENVIRONMENTAL Attributes: All adhesives and binders in this product contain no added urea-formaldehyde.
This product is manufactured with pre-consumer recycled material.
This product may contribute to credits requiring regional harvesting or recovery of raw material and regional manufacturing.
For additional information on product contribution please refer to the **GREENDOR™** Contribution Sheets.

Manufacturing Options

BLOCKING:	No additional blocking required. Core material complies with Screw holding WDMA TM-10 extra heavy duty.	
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, raceways, concealed vertical rods, dutch doors, Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.	
TRANSPARENT FINISH	WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains	Options: Other finish systems available
OPAQUE FINISH:	Factory painting in standard and custom match colors	Options: Standard or color tinted priming available