



Blakely 6'8"				
All dimensions nominal before prefit and bevel.				
DW	Α	В		
3-0	25.00	5.50		
2-10	22.81	5.59		
2-8	22.81	4.59		
2-6	19.56	5.21		
2-4	18.12	4.93		
2-2	14.93	5.53		
2-0	14.93	4.53		
1-10	14.93	3.53		
1-8	9.50	5.25		
1-6	9.50	4.25		
Bottom rail dimension does not comply with ADA requirements.				

BlakelyMolded Profile Door



DIMENSIONS ARE IN: Inches The INFORMATION COMAINED IN HIS DRAWNIGS THE DOOR TO LERANCES WIDTH (FULL WIDTH): ±1/16 WIDTH (FULL WIDTH): ±1/32 HEIGHT: ±1/32 HEIGHT: ±1/32 AVENUE HEIGHT: ±1/32 HEIGHT: ±1/32 HORD AVENUE HEIGHT: HERMISION OF Lynden Door, inc. is PROHIBITED. HEIGHT: ±1/32 HORD AVENUE HEIGHT: HERMISION OF Lynden Door, inc. is PROHIBITED. HEIGHT: ±1/32 HORD AVENUE HEIGHT: HERMISION OF Lynden Door, inc. is PROHIBITED. HEIGHT: HERMISION OF Lynden Door, inc. is PROHIBITED. HEIGHT: HERMISION OF LYNDEN HERMISION OF LY

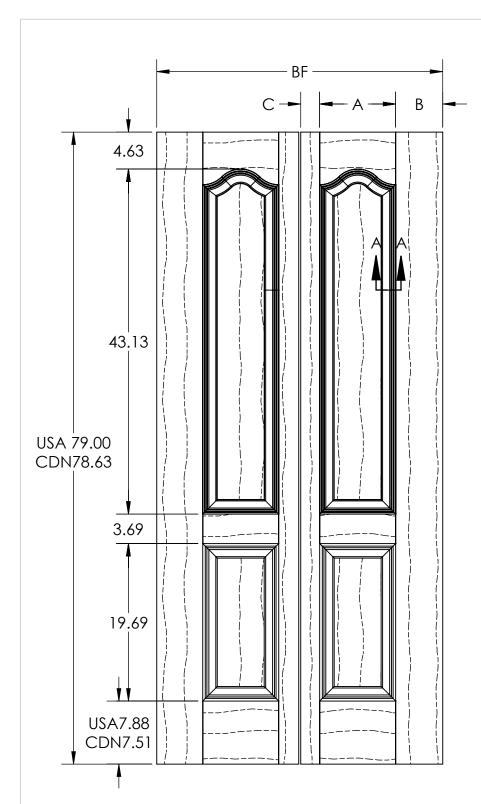



Blakely Bifold 6'8"			
BF	Α	В	С
3-0	9.50	5.87	2.38
2-8	9.50	3.87	2.38
2-6	7.50	5.00	2.25
2-4	7.50	4.00	2.25
2-0	6.74	3.23	1.78
1-8	6.74	1.78	1.23
1-6	6.74	1.03	0.98

Use of heavy duty hardware may require additional undercut.
Lynden Door standard is 3/4"

BlakelyMolded Profile Bifold



IMENSIONS ARE IN: Inches OOR TOLERANCES 11 Inches IN INCOMPLIAN COMPANIES IN INCOMPLIANCE IN I