


LD Architectural Series

Division 08 14 23.13
High Pressure Decorative
Laminate Doors

LD2000 HPDL-5

Wood Particleboard Core
Non-Rated or 20-Minute Rated

FACES:	High Pressure Decorative Laminate (HPDL) faces to meet minimum requirements of National Electrical Manufacturers Association (NEMA) Standard LD3 HPDL.		
SUBSTRATE:	Engineered wood composites		
CORE:	Particleboard ANSI A208.1 LD1 Option: LD2		
STILES:	(ME) Matching with decorative laminate face, AWS Type C HPDL Option: Wood edges painted or stained to complement decorative laminate face		
RAILS:	Mill option structural composite lumber, wood, or composite material		
ASSEMBLY:	Stiles and rails are securely bonded to the core and the assembled unit is sanded prior to application of faces.		
ADHESIVES:	Type 1		
MAXIMUM SIZE:	Positive Pressure	4'0" x 9'0" (1219mm x 2743mm)	
	Neutral Pressure	3'0" x 10'0" (914mm x 3048mm) or 4'0" x 9'0" (1219mm x 2743mm)	
THICKNESS:	Non-Rated	1-3/8" (35mm) or 1-3/4" (45mm)	Option: Up to 2-1/4" (57mm)
	20-Minute Rated	1-3/4" (45mm)	Option: Up to 2-1/4" (57mm)
WARRANTY:	Life of original installation; for interior use only. SEE WARRANTY TERMS AND CONDITIONS.		
STANDARDS:	WDMA IS-1A and AWS Premium Grade		
	Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty standards when specified with blocking for surface applied hardware without through bolts.		
FIRE-RATING:	Positive Pressure Category B or Neutral Pressure Option: Positive Pressure Category A		
	Positive Pressure tested in accordance with UBC 7-2 1997, UL 10C, and NFPA 252.		
	Neutral Pressure with hose stream tested in accordance with UBC 7 1994 and UL 10B.		
	For additional information on fire doors, please refer to the Lynden Door Fire Door Technical Sheets.		
ACOUSTICAL RATING:	STC 32 ASTM E90-09 – Non-Operable* OITC 30 ASTM E90-09 – Non-Operable * When installed with one row of NGP 5075, one row of NGP 5060, a NGP 335S x STC 2 Auto Door Bottom, and NGP 60FP Corner Pads; or one row of Pemko S773, one row of Pemko S44, a Pemko PDB 411 AE Auto Door Bottom, and Pemko ACP 112 Corner pads; the STC performance will be equal to an operable test rating of STC 32.		
ENVIRONMENTAL ATTRIBUTES:	This product is TSCA Title VI compliant.		
	This product is manufactured with pre-consumer recycled material. For additional information on product contribution, please refer to the GreenDor™ Contribution Sheets.		

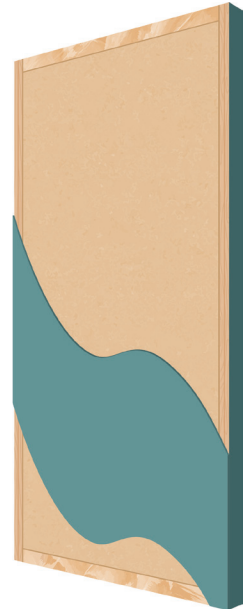

Manufacturing Options

BLOCKING:	Special blocking options may be specified (reference WDMA I.S.1A blocking options HB-1 through HB-8).
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, applied moldings, plant-ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms. Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings. Note: Fire rated doors must glazed under label service.