


# FLUSH

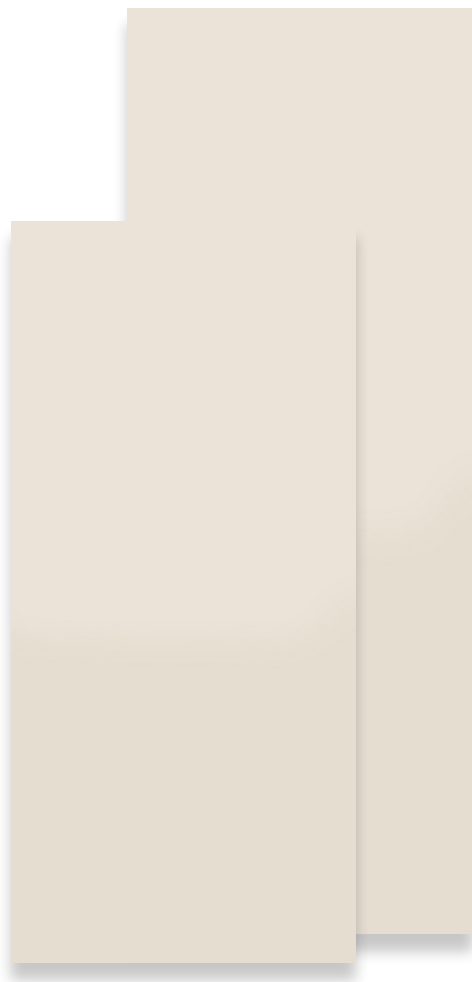

## PRIMED HARDBOARD

### STYLE: PRIMED HARDBOARD | SMOOTH

Exceptional quality at an affordable price.

#### FEATURES

- High density fiberboard. Resists shrinking, swelling, cracking, and joint separation.
- Offered in hollow or solid core construction and 1-3/8" and rated/non-rated 1-3/4" thickness.
- Passage and bifold doors offered in 6'8", 7'0" & 8'0" sizes.
- CARB (California Air Resource Board) and TSCA Title VI compliant door facings with No Added Urea Formaldehyde.
- Custom factory machining and painting available.
- Wide top and bottom rails allow trimming of up to 1" on each end.
- 1-year limited warranty.

2077 Main St., P.O. BOX 528  
Lynden, WA 98264

800.631.DOOR (3667)  
360.354.5676

[info@lyndendoor.com](mailto:info@lyndendoor.com)

[LYNDENDOOR.COM](http://LYNDENDOOR.COM)