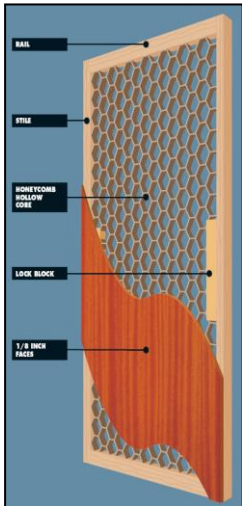


**Lynden Door
Commercial Series
GREENDOR™**
**CD100 NAUF
Hollow Core
NAUF
Non Rated**


FACES:	HPVA Architectural "A" grade wood veneer (minimum thickness 1/50" before sanding) Options: "AA" grade wood veneer, paint grade MDO Hardboard (PC3)
SUBSTRATE:	Engineered wood composites
CORE:	Supercell expanded kraft corrugated paper with particleboard lockblocks
STILES:	Softwood - AWS Type A Solid Wood Option: (CE) Compatible with face veneer, AWS Type B Wood Veneer
RAILS:	Mill option structural composite lumber, wood or composite material.
ASSEMBLY:	Non Bonded (Loose Lay).
ADHESIVES:	Type 1
MAXIMUM SIZE:	4'0" x 10'0" (1220mm x 3050mm)
THICKNESS:	1 3/8" (35 mm) or 1 3/4" (45 mm)

WARRANTY:	2 years, for interior use only. See warranty terms and conditions
STANDARDS:	Performance attributes meet or exceed WDMA IS-1A and AWS Extra Heavy Duty Standards when specified with blocking for surface applied hardware without through bolts. Option: WDMA IS-1A and AWS Custom Grade
FIRE RATING:	Not applicable
ACOUSTICAL RATING	Not applicable
ENVIRONMENTAL Attributes:	All adhesives and binders in this product contain no added urea-formaldehyde. This product is manufactured with pre-consumer recycled material. This product may contribute to credits requiring regional harvesting or recovery of raw material and regional manufacturing. For additional information on product contribution please refer to the GREENDOR™ Contribution Sheets.

Manufacturing Options

BLOCKING:	Special blocking options may be specified. (Reference WDMA I.S.1A blocking options HB-1 through HB-8)
MACHINING:	Machining for hardware, open cutouts, installation of lites and louvers, applied moldings, plant ons, raceways, concealed vertical rods, decorative routing, dutch doors, doors and transoms - Hardware cutouts shall be factory machined from manufacturers' templates and shop drawings.
TRANSPARENT FINISH	WDMA TR6 / AWS System 9 -UV cured catalyzed polyurethane finishes in standard and custom match stains Options: Other finish systems available
OPAQUE FINISH:	Factory painting in standard and custom match colors Options: Standard or color tinted priming available